

HARVESTER
HEADS

IGSA 700HD-TS

DIV.

FORESTRY

GUERRA





DIMENSIONS


OVERALL DIMENSIONS CLOSED

Height	2430 mm
Width	1430 mm
Length	1380 mm



DIMENSIONS IN WORKING POSITION

Height	2975 mm
Width (rollers closed)	1430 mm
Width (rollers open)	1700 mm
Length	1860 mm
Weight (from)	2525 Kg

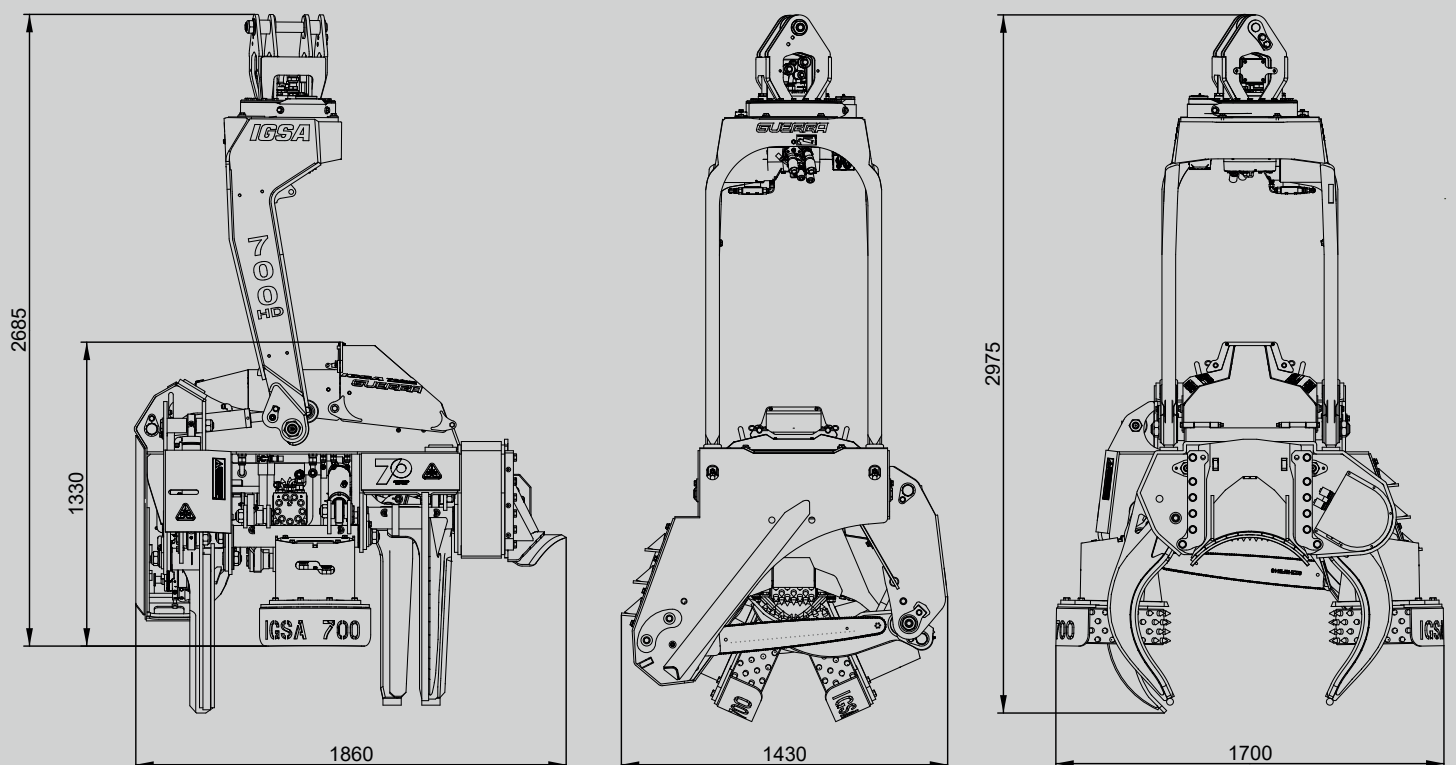

TECHNICAL DATA

ROTATION 360° continuous

FELLING

Diameter max. opening rollers	70 cm
Diameter max. felling	75 cm
IGSA Hydraulic Chain saw	
Power	45 kW
Chain pitch	0.4"
Max saw bar length	82 cm
Chain tensioning and automatic guide bar attachment (JET FIT)	

FEEDING EQUIPMENT

3 pinch rollers	
Traction motor	STD (630-400) cc
Maximum feeding speed	0-6 m/s

NEW FEATURES

GUERRA IGSA 700HD-TS HEAD IS EQUIPPED WITH TOP SAW INTEGRATED INTO THE CHASSIS. SEVERAL IMPROVEMENTS MAKE IT A HIGHLY VERSATILE HEAD FOR PINE AND EUCALYPTUS WORK.

PRODUCTIVITY:

- Higher saw speed.
- New floating blade that allows optimal delimiting in both eucalyptus and pine.
- High precision hydraulic measuring system for pine production.
- Top saw to maximize the number of cuts and the utilization in both pine and eucalyptus.

MECHANICAL AVAILABILITY:

- New generation of clamps with greater strength and higher service factor (↑ 25%) which increases their durability.
- Use of stronger materials and surface treatments to ensure greater mechanical availability.
- New damping lugs for increased durability.

MAINTENANCE:

- New safety valve to increase the durability of the slewing motor.
- New linear measuring encoder to withstand higher vibrations.

SECURITY:

- New mechanical protection against possible ejection of elements from the saw chain.

OPTIONAL EQUIPMENT

- Automatic stump treatment.
- Color marking.
- 500-315 cc traction motor.
- Xlogger measuring equipment with 12" touch screen.
- Telemetry and remote management.
- Reversible side rollers.

DELIMITING

Delimiting diameter	5 - 70 cm
Floating knife system	pine and eucalyptus

2 upper knives with independent cylinders and a lower knife

RECOMMENDED BASE MACHINE

Type	excavator
Weight	20 - 35 T
Recommended flow to 250 bar	250 l/min
Pressure	290 bar

CONTROL AND MEASUREMENT SYSTEM

Standard	illogger LHCS3
----------	----------------

TOP SAW

Diameter max. felling	40
Max saw bar length	75 cm
Capacity	14cc
Chain pitch	0.4"
Chain tensioning and automatic guide bar attachment (JET FIT)	





GUERRA

VILA DE CRUCES [PO] SPAIN	36590
IGUERRA.COM	

● HEADQUARTERS ↘

VILA DE CRUCES

Engineering, production and assembly plant.
Avd. Benigno Sánchez S/N
36590 Vila de Cruces / Pontevedra. Spain
T_ (+34) 986 582 000
info@iguerra.com

SILLEDA

CNC Machining plant and supply center.
Parque empresarial Silleda Área 33 Parcela 32
36540 Silleda / Pontevedra. Spain
T_ (+34) 986 582 000

OIRÓS

Integrations and automation plant.
Lugar Tenza do Río Outeiro S/N
36590 Vila de Cruces / Pontevedra. Spain
T_ (+34) 986 582 000

SANTIAGO DE COMPOSTELA

Repairs, maintenance and sale of spare parts.
Vía de la Cierva 12
15898 Santiago de Compostela / A Coruña. Spain
T_ (+34) 981 51 98 30

MANGUALDE

Distribution plant. Portugal.
Zona Industrial Salgueiro / Lt. 14
Aptd.166 / Portugal

BUENOS AIRES

Distribution plant. Argentina.
Colectora Este Panamericana Ricardo Rojas
Provincia de Buenos Aires. Argentina
T_ (+54) 11 6374-1300

CORRIENTES

Distribution plant. Argentina.
Ruta 14, kilómetro 749, Gobernador Virasoro
Provincia de Corrientes, Argentina.



In favour of improving our products, INDUSTRIAS GUERRA reserves the right to make whatever modifications it considers appropriate without prior notice.

ED:012026